

CE:0038


DOUBLE ECCENTRIC,BUTTERFLY VALVE

Product Description:

Double eccentric butterfly valve to EN 593 w. ss seat and IP68 gearbox w/handwheel and neutral liquids to max. 70°C

Standards:


- Designed according to DIN/EN, Designed according to EN 593
- Face to face according to EN 558 Table 1/2 Basic Series 13/14
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

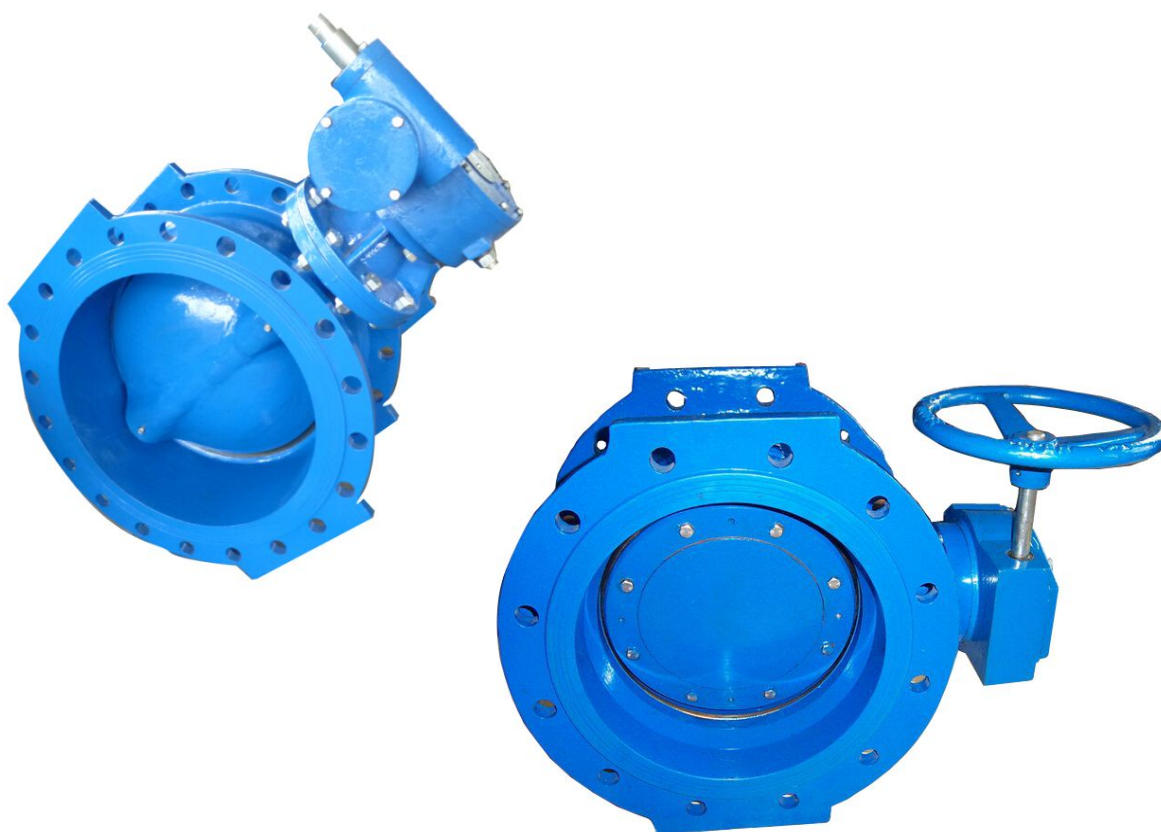

NO.	Description	Material
1	BODY	EN-GJS-400-15,GGG40
2	DISC	EN-GJS-400-15,GGG40
3	body seat surface	CrNi-Plasma
4	SEAT	EPDM.NBR.VITON
5	O-RING	EPDM/NBR
6	Shaft	X20Cr13,SS416
7	Bearing Bush	CC480K,CuSn 10

CE:0038

DOUBLE ECCENTRIC, BUTTERFLY VALVE

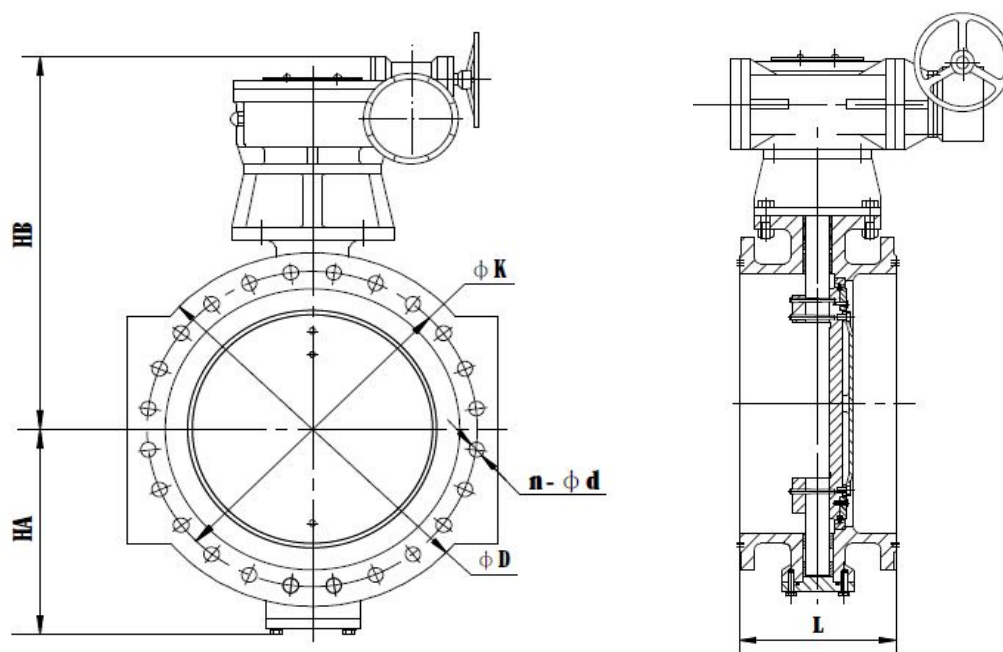

Unit:mm

Size	HA	HB	L		DIN PN10			DIN PN16		
			LONG	SHORT	D	K	n-Φd	D	K	n-Φd
DN300	245	345	270	178	445	400	12-Φ23	460	410	12-Φ27
DN350	295	360	290	190	505	460	16-Φ23	520	470	16-Φ27
DN400	330	620	310	216	565	515	16-Φ27	580	525	16-Φ30
DN450	360	650	330	222	615	656	20-Φ27	640	585	20-Φ30
DN500	375	690	350	229	670	620	20-Φ27	715	650	20-Φ33
DN600	425	770	390	267	780	725	20-Φ30	840	770	20-Φ36
DN700	520	860	430	292	895	480	24-Φ30	910	840	24-Φ36
DN800	580	920	470	318	1015	950	24-Φ33	1025	950	24-Φ39
DN900	640	1085	510	330	1115	1050	28-Φ33	1125	1050	28-Φ39
DN1000	710	1210	550	410	1230	1160	28-Φ36	1255	1170	28-Φ42
DN1200	855	1142	630		1455	1380	32-Φ41	1355	1390	32-Φ50
DN1400	975	1252	710		1675	1590	36-Φ44	1485	1590	36-Φ50
DN1600	1100	1392	790		1915	1820	40-Φ50	1685	1820	40-Φ57
DN1800	1280	1572	870		2115	2020	44-Φ50	1930	2020	44-Φ57
DN2000	1390	1750	950		2325	2320	48-Φ50	2130	2230	48-Φ62