

CE:0038

GROOVED END , BUTTERFLY VALVE



Description

- Grooved end butterfly valve with long neck and 4 centering holes
- Face-to-face length acc. EN558 - BS5155 - ISO5752 - API609
- With top flange acc. ISO 5211
- Mounting between flanges acc DIN PN 6/10/16 and ANSI 150
- Exchangeable seat vulcanized on hard centre with 2 lay-in O-rings
- Epoxy coating thickness min. 200 micron
- Application: warm and cold water, clean, waste and salt water, oil, granulates, compressed air, natural gas, etc.

Temperature Range

EPDM -20°C...+120°C

BUNA -10°C...+ 90°C

FPM/FKM -10°C...+170°C

Max. Working Pressure

Max. working pressure 16,0 bar

Hydraulic body test 24,0 bar

Hydraulic seat test 17,8 bar


AISI 316 stem execution 10,0 bar



NO.	Description	Material
1	BODY	GGG40,GGG50
2	DISC	GGG40+EPDM,GGG50+EPDM
3	STEM	SS416/420
4	SEAT	...
5	O-Ring	EPDM/NBR
6	Bushing	PTFE
7	Circlip	STEEL
8	Retainer	STEEL

CE:0038

GROOVED END , BUTTERFLY VALVE

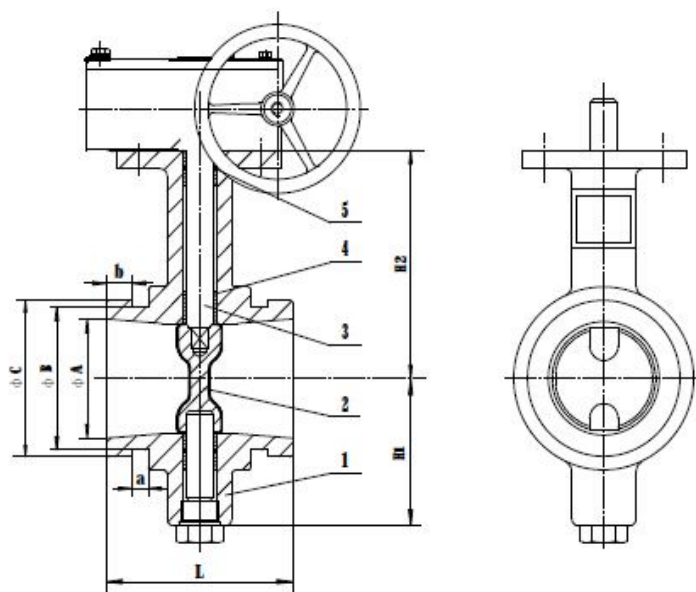

Tow Standard		BS		ANSI	
SIZE		L	ΦC	L	ΦC
50		82.5	60.3	82.5	60.3
65		96.9	76.1	96.9	73
80		97.3	88.9	97.3	88.9
100		116.8	114.3	116.8	114.3
125		147.6	141.3	147.6	141.3
150		148.3	165.1	148.3	165.1
200		134.5	219.1	134.5	219.1

OK-VALVES-CONTACT US

Tel:+86-319-8304809

+86-319-8301008

+86-319-8307099

Fax:+86-319-5657008

E-mai: sales@okv-valve.com