


# OK-305-JOINT



NO.	PART	Choose	QTY
1	BELLOW	EPDM /NBR	1
2	REINFORCEMENT	NYLONG TYRE CORD	1
3	UNION	MALLEABLE	2
TEST PRESSURE		SHELL	SEAL
		HYDROSTATIC	2.4 MPa
STANDARD	DESIGN CODE	EN 593	
	INSPECTION & TEST	EN 12266	
	END STANDARD	PN10/16	
	FACE TO FACE	EN 558	

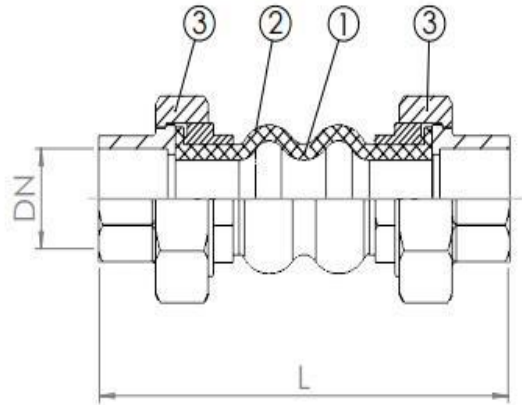

## GENERAL CHARACTERISTICS

Female cast iron 3 pieces BSPT threaded union ends.

Movement :

- Axial compression,
- Axial extension,
- Lateral movement.

## STANDARDS

BSPT female threaded according to standard ISO 228-1.



Size	L	Le	Lc	LI	A°
DN15	200	6	22	22	20°
DN20	200	6	22	22	20°
DN25	200	6	22	22	20°
DN32	200	6	22	22	20°
DN40	200	6	22	22	20°
DN50	220	6	22	22	20°