


OK-503-STAINLESS



OK VALVE®
宏邦阀门

NO.	PART	Choose	QTY
1	BODY	CF8/CF8M	1
2	DISC	CF8/CF8M	1
3	NUT	SS304/SS316	1
4	BOLT	SS304/SS316	3
5	O-RING	EPDM/NBR/VITON	3
TEST PRESSURE		SHELL	SEAL
		HYDROSTATIC 2.4 MPa	1.76 MPa
STANDARD	DESIGN CODE	API 609/EN 593	
	INSPECTION & TEST	API 598/EN 12266	
	END STANDARD	PN10/16 150LB 10K	
	FACE TO FACE	API 609/EN 558	

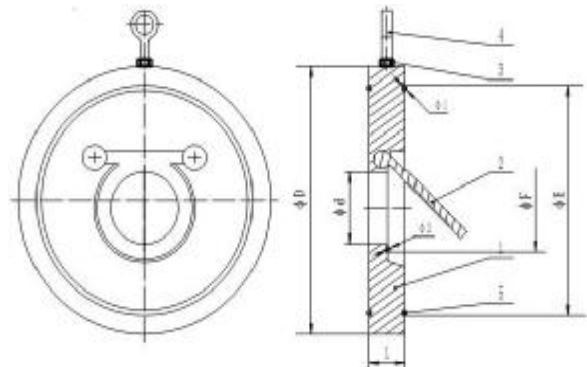

GENERAL CHARACTERISTICS

Design in accordance with standard NF EN 14341.

Range: From DN 40 to DN 600.

Mounting and working position in horizontal and vertical ascending fluid.

Short length.

Easy mounting.

Low weight.

Low head loss.

Seat inside body.



STANDARDS

Face to face according to standard E 29-377 tab 2 serie FR,
except DN 200 : serie FR variant ISO PN 16.

Mounting between flanges PN 16.

Size	PN10/16		125LB		φ C
	L	φ C	L	φ C	
2"/DN50					PN10/16 125LB 10K
2-1/2"/DN65					PN10/16 125LB 10K
3"/DN80					PN10/16 125LB 10K
4"/DN100					PN10/16 125LB 10K
5"/DN125					PN10/16 125LB 10K
6"/DN150					PN10/16 125LB 10K
8"/DN200					PN10/16 125LB 10K