


OK-203-HANDWHEEL



OK VALVE®
宏邦阀门

NO.	PART	Choose	QTY
1	BODY	GGG50	1
2	WEDGE	GG50+EPDM	1
3	STEM	SS416	1
4	GASKET	EPDM	2
5	BONNET	DI	5
6	LOCATING	BRASS	3
7	O-RING	EPDM	1
8	NUT	BRASS	
TEST PRESSURE		HYDROSTATIC	
		SHELL 2.4 MPa	SEAL 1.76 MPa
STANDARD	DESIGN CODE	EN 593	
	INSPECTION & TEST	EN 12266	
	END STANDARD	PN10/16	
	FACE TO FACE	EN 558	

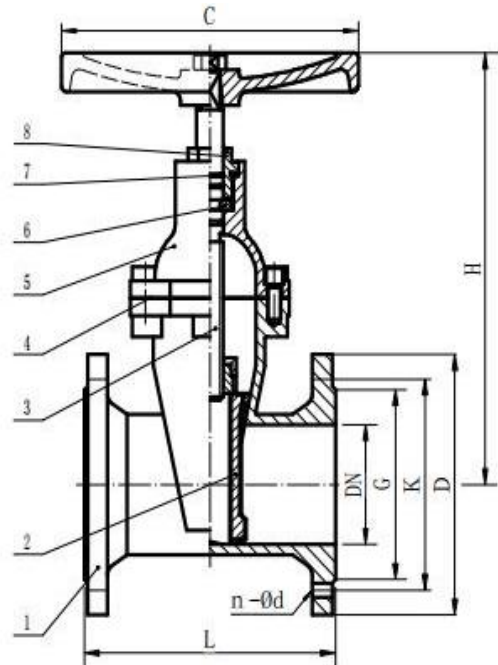

GENERAL CHARACTERISTICS

Full and total bore
 Stainless steel non rising stem
 Clockwise to close
 Ductile iron wedge EPDM coated
 No retention area
 Heel positioning
 EPDM bonnet gasket
 Screws bonnet protected
 3 EPDM O ring on stem
 Possibility to change stem gasket under pressure
 Epoxy painting RAL 5015 color 250 µm thickness
 Dust-coat on stem
 ISO PN10/16.



DN250-DN600 CONTACT

Size	H	C	D	L	φ C
2"/DN50	230	180	165	150	PN10/16
2-1/2"/DN65	265	180	185	170	PN10/16
3"/DN80	265	220	200	180	PN10/16
4"/DN100	310	240	220	190	PN10/16
5"/DN125	390	260	250	200	PN10/16
6"/DN150	390	260	285	210	PN10/16
8"/DN200	425	280	340	230	PN10/16