


OK-204-HANDWHEEL



OK VALVE®
宏邦阀门

NO.	PART	Choose	QTY
1	BODY	GGG50	1
2	WEDGE	GG50+EPDM	1
3	STEM	SS416	1
4	GASKET	EPDM	2
5	BONNET	DI	5
6	LOCATING	BRASS	3
7	O-RING	EPDM	1
8	NUT	BRASS	
TEST PRESSURE		HYDROSTATIC	
		SHELL 2.4 MPa	SEAL 1.76 MPa
STANDARD	DESIGN CODE	EN 593	
	INSPECTION & TEST	EN 12266	
	END STANDARD	PN10/16	
	FACE TO FACE	EN 558	

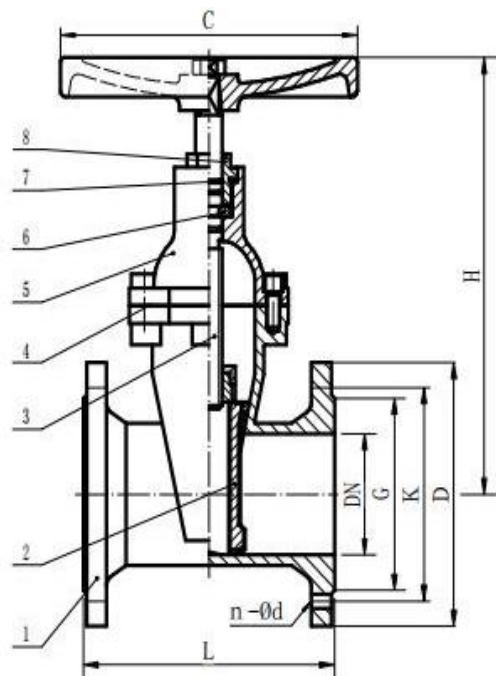

GENERAL CHARACTERISTICS

Full and total bore
 Stainless steel non rising stem
 Clockwise to close
 Ductile iron wedge EPDM coated
 No retention area
 Heel positioning
 EPDM bonnet gasket
 Screws bonnet protected
 3 EPDM O ring on stem
 Possibility to change stem gasket under pressure
 Epoxy painting RAL 5015 color 250 µm thickness
 Dust-coat on stem
 ISO PN10/16.



DN250-DN600 CONTACT

Size	H	C	D	L	φ C
2"/DN50	300	180	165	250	PN10/16
2-1/2"/DN65	345	180	185	270	PN10/16
3"/DN80	390	220	200	280	PN10/16
4"/DN100	430	240	220	300	PN10/16
5"/DN125	510	260	250	325	PN10/16
6"/DN150	565	260	285	350	PN10/16
8"/DN200	680	280	340	400	PN10/16