


OK-701-HANDLE



OK VALVE®
宏邦阀门

NO.	PART	Choose	QTY
1	BODY	CI/DI	1
2	SEAT	EPDM/NBR/VITON/PTFE	1
3	DISC	DI+NP/CF8/CF8M/AL-B	1
4	STEM	416/431/304/316/17-4PH	2
5	BUSHING	PTFE/BRASS	5
6	O-RING	NBR	3
7	LEVER	CAST/ALUMINUM	1
TEST PRESSURE		SHELL	SEAL
		HYDROSTATIC 2.4 MPa	1.76 MPa
STANDARD	DESIGN CODE	API 609/EN 593	
	INSPECTION & TEST	API 598/EN 12266	
	END STANDARD	PN10/16 150LB 10K	
	FACE TO FACE	API 609/EN 558	

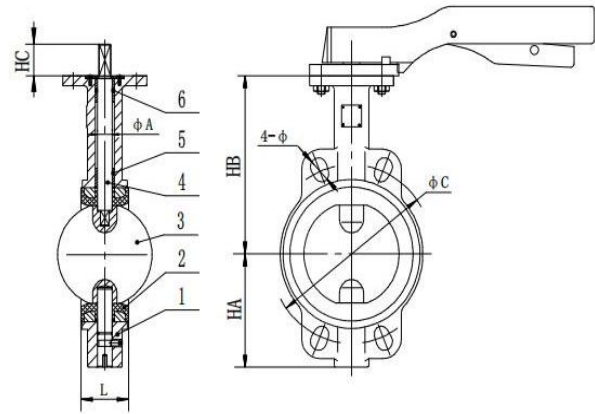

GENERAL CHARACTERISTICS

Design according with API 609/EN 593

Tightness in both ways. Lug type with threaded ears

Flexible sleeve adapted to the shape of the body assures low operating torque. High and low semi stem giving a high flow coefficient, machined disc on periphery giving a low and regular torque. Unejectable stem, mounting flange according to ISO 5211.



STANDARDS

Manufacture according to the requirements of the European directive 2014/68/EU «Equipment under pressure»: modulate H. Face to face according to standards NF EN 558 serie 20, ISO 5752 série 20, DIN 3202.

Mounting with flanges PN10/PN16/150LB/10K from DN50 to DN600 from DN200 to DN300 according to API 609/EN 1092-2.

Pressure test according to standards API 609/EN 12266-1, DIN 3230, BS 6755 and ISO 5208

DN250-DN600 CONTACT

Size	H1	H2	L	HC	φ C
2"/DN50	66	130	43	32	PN10/16 150LB 10K
2-1/2"/DN65	75	140	46	32	PN10/16 150LB 10K
3"/DN80	95	150	46	32	PN10/16 150LB 10K
4"/DN100	105	170	52	32	PN10/16 150LB 10K
5"/DN125	122	180	56	32	PN10/16 150LB 10K
6"/DN150	134	205	56	32	PN10/16 150LB 10K
8"/DN200	168	235	60	36	PN10/16 150LB 10K