


OK-711-SIGNAL



OK VALVE®
宏邦阀门

NO.	PART	Choose	QTY
1	BODY	DI	1
2	SEAT	DI	1
3	DISC	DI+EPDM	1
4	STEM	416	2
5	BUSHING	PTFE	5
6	O-RING	NBR	3
7	GEAR	SIGNAL GEAR BOX	1
TEST PRESSURE		SHELL	SEAL
		HYDROSTATIC 2.4 MPa	1.76 MPa
STANDARD	DESIGN CODE	API 609/EN 593	
	INSPECTION & TEST	API 598/EN 12266	
	END STANDARD	PN16 150LB	
	FACE TO FACE	API 609/EN 558	

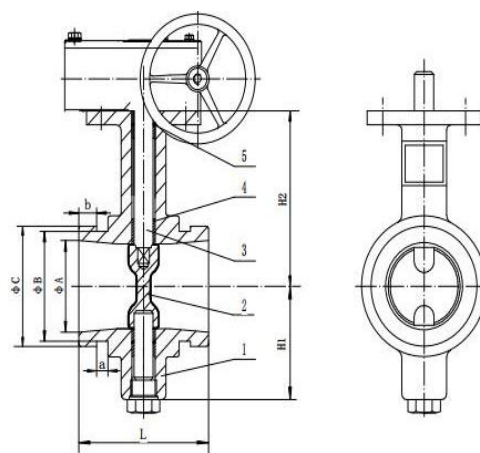

GENERAL CHARACTERISTICS

Design according with API 609/EN 593

Tightness in both ways. Lug type with threaded ears

Flexible sleeve adapted to the shape of the body assures low operating torque. High and low semi stem giving a high flow coefficient, machined disc on periphery giving a low and regular torque. Unejectable stem, mounting flange according to ISO 5211.


STANDARDS

Manufacture according to the requirements of the European directive 2014/68/EU «Equipment under pressure»: modulate H. Face to face according to standards NF EN 558 serie 20, ISO 5752 série 20, DIN 3202.

Mounting with flanges PN16/150LB from DN50 to DN600

from DN200 to DN300 according to API 609/EN 1092-2.

Pressure test according to standards API 609/EN 12266-1, DIN 3230, BS 6755 and ISO 5208

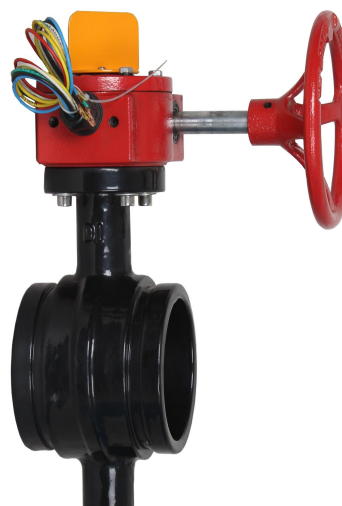

Size	H1	H2	L	φ A	φ C
2"/DN50	70	100	82.4	50	PN16 150LB
2-1/2"/DN65	75	106	96.8	61	PN16 150LB
3"/DN80	82	113	96.8	80	PN16 150LB
4"/DN100	100	135	115.8	101	PN16 150LB
5"/DN125					
6"/DN150	130	176	147.6	150	PN16 150LB
8"/DN200	162	204	133.4	202	PN16 150LB